

LETTER • **OPEN ACCESS**


Emission factor of ammonia (NH_3) from on-road vehicles in China: tunnel tests in urban Guangzhou

To cite this article: Tengyu Liu *et al* 2014 *Environ. Res. Lett.* **9** 064027

View the [article online](#) for updates and enhancements.

You may also like

- [Advancing national greenhouse gas inventories for agriculture in developing countries: improving activity data, emission factors and software technology](#)
Stephen M Ogle, Leandro Buendia, Klaus Butterbach-Bahl *et al.*
- [Relationships between economic development and resident environmental behavior and participation in areas with different economic and similar natural and cultural conditions](#)
Junli Wu, Guijuan Gao, Bing Zhang *et al.*
- [Impacts of transboundary air pollution and local emissions on \$\text{PM}_{2.5}\$ pollution in the Pearl River Delta region of China and the public health, and the policy implications](#)
X Hou, C K Chan, G H Dong *et al.*

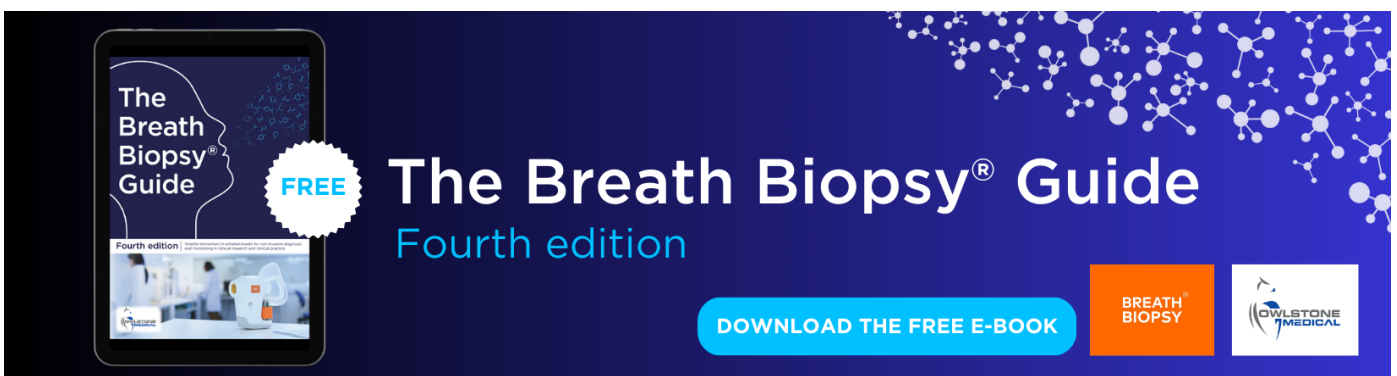

The Breath Biopsy® Guide
Fourth edition

FREE

DOWNLOAD THE FREE E-BOOK

BREATH BIOPSY

OWLSTONE MEDICAL

Emission factor of ammonia (NH₃) from on-road vehicles in China: tunnel tests in urban Guangzhou

Tengyu Liu^{1,2}, Xinming Wang¹, Boguang Wang³, Xiang Ding¹, Wei Deng^{1,2}, Sujun Lü^{1,2} and Yanli Zhang¹

¹ State Key Laboratory of Organic Geochemistry, Guangzhou Institute of Geochemistry, Chinese Academy of Sciences, Guangzhou 510640, People's Republic of China

² University of Chinese Academy of Sciences, Beijing 100049, People's Republic of China

³ Institute of Atmospheric Environmental Safety and Pollution Control, Jinan University, Guangzhou 510632, People's Republic of China

E-mail: wangxm@gig.ac.cn and bongue@126.com

Received 1 April 2014, revised 31 May 2014

Accepted for publication 2 June 2014

Published 23 June 2014

Abstract


Ammonia (NH₃) is the primary alkaline gas in the atmosphere that contributes to formation of secondary particles. Emission of NH₃ from vehicles, particularly gasoline powered light duty vehicles equipped with three-way catalysts, is regarded as an important source apart from emissions from animal wastes and soils, yet measured emission factors for motor vehicles are still not available in China, where traffic-related emission has become an increasingly important source of air pollutants in urban areas. Here we present our tunnel tests for NH₃ from motor vehicles under 'real world conditions' in an urban roadway tunnel in Guangzhou, a central city in the Pearl River Delta (PRD) region in south China. By attributing all NH₃ emissions in the tunnel to light-duty gasoline vehicles, we obtained a fuel-based emission rate of $2.92 \pm 0.18 \text{ g L}^{-1}$ and a mileage-based emission factor of $229.5 \pm 14.1 \text{ mg km}^{-1}$. These emission factors were much higher than those measured in the United States while measured NO_x emission factors ($7.17 \pm 0.60 \text{ g L}^{-1}$ or $0.56 \pm 0.05 \text{ g km}^{-1}$) were contrastingly near or lower than those previously estimated by MOBILE/PART5 or COPERT IV models. Based on the NH₃ emission factors from this study, on-road vehicles accounted for 8.1% of NH₃ emissions in the PRD region in 2006 instead of 2.5% as estimated in a previous study using emission factors taken from the Emission Inventory Improvement Program (EIIP) in the United States.

Keywords: emission factors, tunnel tests, ammonia, nitrogen oxide, emissions, vehicles

1. Introduction

Ammonia (NH₃) is the third abundant nitrogen-containing gas in the atmosphere, after N₂ and N₂O (Seinfeld and Pandis 1998). As the primary alkaline gas in ambient air, NH₃ can neutralize nitric and sulfuric acid to form ammonium nitrate and sulfate (Pinder *et al* 2007), which are

important constituents of airborne fine particles or PM_{2.5} (Chow *et al* 1994). China, for example, has serious air quality problem due to PM_{2.5} pollution in the recent decade (Chan and Yao 2008, Zhang *et al* 2012a), and ammonium alone had contributed over 5% of the PM_{2.5} mass in its megacities (He *et al* 2001, Pathak *et al* 2009, Ianniello *et al* 2011, Meng *et al* 2011, Yang *et al* 2011, Wang *et al* 2012). Another important role played by NH₃ is that it enhances the nucleation of sulfuric acid particles, and thus influences new particle formation events (Ortega *et al* 2008, Kirkby *et al* 2011). In addition, wet and dry deposition of NH₃ and ammonium may cause eutrophication and even

 Content from this work may be used under the terms of the Creative Commons Attribution 3.0 licence. Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

perturbation of ecosystems (Pearson and Stewart 1993, Seinfeld, Pandis 1998).

The major sources for atmospheric NH_3 include animal wastes, biological processes in soils and ammonia-based chemical fertilizers, followed by biomass burning, and sewage treatment plants (Bouwman *et al* 1997, Asman 1998). The contribution of on-road mobile sources has been considered to be negligible (Pierson and Brachaczek 1983). However, recent highway tunnel (Moeckli *et al* 1996, Fraser and Cass 1998, Emmenegger *et al* 2004, Kean *et al* 2000, 2009) and chassis dynamometer (Durbin *et al* 2002, Huai *et al* 2003) studies indicate that NH_3 emissions from vehicles may be larger than previously estimated, which is mainly attributed to the chemistry over three-way catalysts (TWC) equipped on gasoline powered light duty vehicles (Bradow and Stump 1977, Cadle and Mulawa 1980). Therefore, road traffic is now recognized as an important source of NH_3 in the urban environment (Sutton *et al* 2000, Battye *et al* 2003). Chitjian *et al* (2000) estimated mobile sources might be responsible for as much as 18% of total NH_3 emissions in the South Coast Air Basin of California. US EPA concluded mobile sources contributed 8% of NH_3 emissions nationwide in 2006 (US EPA 2007).

In China, however, NH_3 emissions from vehicle exhaust were rarely measured and estimated. Huang *et al* (2012) estimated road traffic only contributed 1% of the total NH_3 emissions in 2006 in China. A high-resolution NH_3 inventory developed by Zheng *et al* (2012) for the Pearl River Delta region of China in 2006 indicated that on-road mobile source accounted for 2.5% of the total NH_3 emissions. The above-mentioned two studies in China all adopted emission factors from the same research by Roe *et al* (2004): Zheng *et al* (2012) used the factor for three-way catalyst light-duty gasoline vehicles (63.2 mg km^{-1}) while Huang *et al* (2012) used the average (26 mg km^{-1}) of non-catalyst, oxidation catalyst, and three-way catalyst gasoline vehicles. Though both Huang *et al* (2012) and Zheng *et al* (2012) got negligible contributions from vehicle exhausts to the total ammonia emissions, Ianniello *et al* (2011) and Meng *et al* (2011) suggested that traffic was an important source of ammonia in urban areas of Beijing, China. Since NH_3 in vehicle exhausts may strongly impact the early chemical evolution of exhausts in the ambient, the lack of measured NH_3 emissions factor for vehicles in China would not only result in large uncertainty about the role of on-road motor vehicles in NH_3 emission inventories, but also impede deep understanding of tropospheric chemistry in urban areas.

In the present study, we measured concentration changes of NH_3 and NO_x against CO_2 and CO inside an urban roadway tunnel in the PRD region, the same region for which Zheng *et al* (2012) had estimated NH_3 emissions from on-road mobile source based on emission factors by Roe *et al* (2004). With the assumption that NH_3 emission from diesel trucks is negligible, fuel-based (mg L^{-1}) or mileage-based (mg km^{-1}) NH_3 and NO_x emission factors for light-duty gasoline vehicles under 'real world conditions' were thus calculated and used to estimate and re-evaluate the

contribution of on-road vehicles to the total NH_3 emissions in the region.

2. Methods

2.1. Sampling

NH_3 emission from motor vehicles can be influenced by many factors, such as vehicle and fuel types, emission control technology and driving patterns (Moeckli *et al* 1996, Fraser and Cass 1998, Kean *et al* 2000, 2009, Baum *et al* 2001, Durbin *et al* 2002, Heeb *et al* 2006, 2008, Livingston *et al* 2009). NH_3 emission factors for vehicles can be estimated in road tunnels (Moeckli *et al* 1996, Fraser and Cass 1998, Emmenegger *et al* 2004, Kean *et al* 2000, 2009) or obtained from chassis dynamometer studies (Durbin *et al* 2002, Huai *et al* 2003). Road tunnels are excellent locations to measure vehicle emissions as the influence of meteorological conditions is minimized and the emissions undergo 'real world' dilution effects with minimal interference from other sources, enabling the vehicle emission factors to be determined. More importantly, road tunnel studies provide emissions from a large number of vehicles under 'real world conditions', that is, vehicles operating at hot and stable conditions when going through a road tunnel.

We conducted our tests in the Zhujiang Tunnel. It is an underwater tunnel crossing the Pearl River in the western urban area of Guangzhou, the central city in the Pearl River Delta. Figure 1 shows the layout of the tunnel. The tunnel is 1238 m long with a 721 m flat underwater section and two 517 m open slope sections outside both ends; it has two traffic bores of two lanes with traffic in the same direction each (He *et al* 2008). The vehicle speed limits in the tunnel are $15\text{--}50 \text{ km h}^{-1}$, and the typical vehicle speed is $40\text{--}50 \text{ km h}^{-1}$. It is worth noting that during rush hours (7–9 am and 5–8 pm) all trucks are banned; trucks of Guangzhou with vehicle payload weight higher than five tons and trucks from other cities with vehicle payload weight higher than 0.6 tons are banned from 7 am to 10 pm. During this study, the ventilation fans in the tunnel were turned off to prevent the influence of air turbulence.

A video camera was placed at the exit to record the passing vehicles. Numbers of different types of vehicles were determined from the video tapes. Motor vehicles are classified into taxi, cars, mini-trucks (MTs), light-duty trucks (LDTs), medium-duty trucks (MDTs), heavy-duty trucks (HDTs), light-duty buses (LDBs), medium-duty buses (MDBs), heavy-duty buses (HDBs) and motorcycles. During the sampling period, the traffic densities varied between 105 and 2641 vehicles per hour, with an average of 1782 vehicles per hour.

2.2. Pollutant measurements

Sampling points were located 50 m from both ends of the tunnel inside the western bore with a cross-sectional area of 52.8 m^2 . Sampling time lasted from 3 am 10 August to 0 am 15 August 2013, with an average temperature of $33.4 \pm 3.4 \text{ }^\circ\text{C}$

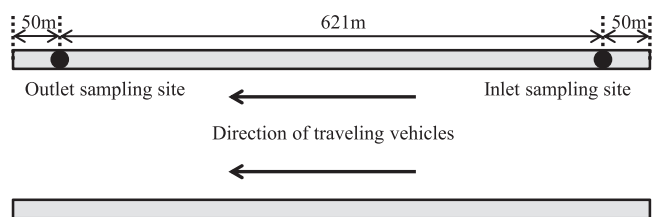


Figure 1. Schematic diagram of the western bore of the Zhujiang Tunnel.

Table 1. NH₃ and NO_x concentrations (ppb) measured at the tunnel inlet and outlet.

	Outlet		Inlet	
	NO _x	NH ₃	NO _x	NH ₃
Minimum	52	40	40	21
Median	1492	756	128	46
Average	1458	729	182	53
Maximum	4232	2776	2519	225
Std. Dev	851	497	311	31

and relative humidity of 53.9%. Measured pollutants included NH₃, NO_x, CO and CO₂.

NH₃ and NO_x were continuously measured by a chemiluminescence analyzer (EC9842, Ecotech, Austria). The EC9842 chemiluminescence NH₃ analyzer combines a high performance ammonia converter (HTO-1000) and proven chemiluminescence detection to measure NH₃, NO_x and total nitrogen compounds (N_x). N_x is the sum of NO, NO₂ and NH₃. To measure N_x concentration, NO₂ and NH₃ are converted to NO in a quartz converter by Pt catalyst at a temperature range of 580–820 °C. In a separate reaction, NO_x is passed through a molybdenum converter heated to approximately 325 °C to convert NO₂ to NO. NO is then detected by the analyzer. The resulting NH₃ concentration is determined by subtracting the N_x result from the NO_x. Measured NH₃ concentration may be interfered by basic gases, such as organic amines or the like. McCulloch and Shendrikar (2000) compared experimental results of concurrent sampling using this method with a Model 17C analyzer (Thermo Environmental Instruments, Franklin, MA) and collocated citric acid denuders (URG, Chapel Hill, NC). Their results demonstrated that this method reliably measured ambient NH₃ concentrations with a high degree of accuracy. This method was also successfully employed to measure NH₃ in the southeastern US (Hansen *et al* 2003, Edgerton *et al* 2007). The instrument was calibrated using a certified cylinder of NO (Foshan Kodi Gas Chemical Industry, China). NH₃ converter efficiency was determined to be 91.28% using a certified cylinder of NH₃ (Beijing AP BAIF Gases Industry, China). The detection limit and accuracy of the NH₃ instrument are 0.5 ppb and ±0.5%, respectively, and the time resolution is 1 min.

For accurately determining CO₂ and CO concentrations during a time interval, two-hour integrated air samples were collected by pumping air into the cleaned aluminum foil bags at a constant rate of 100 ml min⁻¹. Samples were collected

every two hours from 6 am 10 August to 4 am 11 August and from 4 am 12 August to 0 am 13 August for two days. CO concentrations in these air samples were determined using a gas chromatography (Agilent 6980GC, USA) with a flame ionization detector and a packed column (5A Molecular Sieve 60/80 mesh, 3 m × 1/8 inch). Details of this instrument can be found elsewhere (Zhang *et al* 2012b). CO₂ was analyzed with HP 4890D gas chromatography (Yi *et al* 2007). For CO and CO₂ the detection limits were <30 ppb and the relative standard deviations were all less than 3% based on seven duplicates running with CO and CO₂ standards of 1.0 ppm.

3. Results and discussion

3.1. Diurnal variations of NH₃ and NO_x concentrations

Concentrations of NH₃ and NO_x measured at the tunnel inlet and outlet are presented in table 1. Averaged concentrations of NH₃ and NO_x measured at the outlet were 13.8 and 8.0 times that at the inlet, respectively. The average concentration of NH₃ at the tunnel outlet was 729 ppb, much higher when compared to ~390 ppb reported by Moeckli *et al* (1996) at the outlet of Gubrist Tunnel for a one-day exposure period, or 34 μg m⁻³ (48.9 ppb NTP) measured by Fraser and Cass (1998) inside the Van Nuys Tunnel, or 369 ppb observed by Kean *et al* (2000) at the exit of Caldecott Tunnel from 4–6 pm.

As shown in figure 2, NH₃ and NO_x at the tunnel outlet all exhibited diurnal patterns quite similar to that of the total traffic density. Each day both NH₃ and NO_x concentrations had two peaks at the rush hours of 7–9 am and 5–8 pm, and they were higher during evening rush hours than during the morning ones, consistent with about 10% higher total traffic densities during evening rush hours. The maximum concentrations occurred during the evening rush hours with levels over 4000 ppb and 2500 ppb for NO_x and NH₃, respectively. The concentration valleys were reasonable during the nighttime of 0–6 am when traffic density was also the lowest.

Figures 2(b) and (c) show the traffic density profiles for taxi, MTs, LDTs, MDTs, HDTs, cars, LDBs, MDBs, HDBs and motorcycles inside the tunnel. Diurnal patterns of cars and LDBs exhibited two peaks in rush hours, the same as that of the total traffic density. Taxi showed a quite different pattern with a peak at midnight. Densities of MDTs and HDTs showed no significant differences between rush hours and other time periods. As MDTs and HDTs only contributed about 0.5% of the total traffic, the restrictions on trucks might have a negligible effect on the composition of vehicle fleet. Percentages of light-duty (LD) vehicles (cars, taxi, MTs, LDTs and LDBs) were relatively stable during 10 am–10 pm (figure 2(d)) and the sum of cars, LDBs and taxi contributed approximately 82.5% of the total traffic, which was quite near a share of 79.6% for small passenger vehicles in all civil vehicles in Guangzhou in 2012 (Guangdong Provincial Bureau of Statistics (GPBS) and Guangdong Survey Office of National Bureau of Statistics (GSONBS) 2013). This

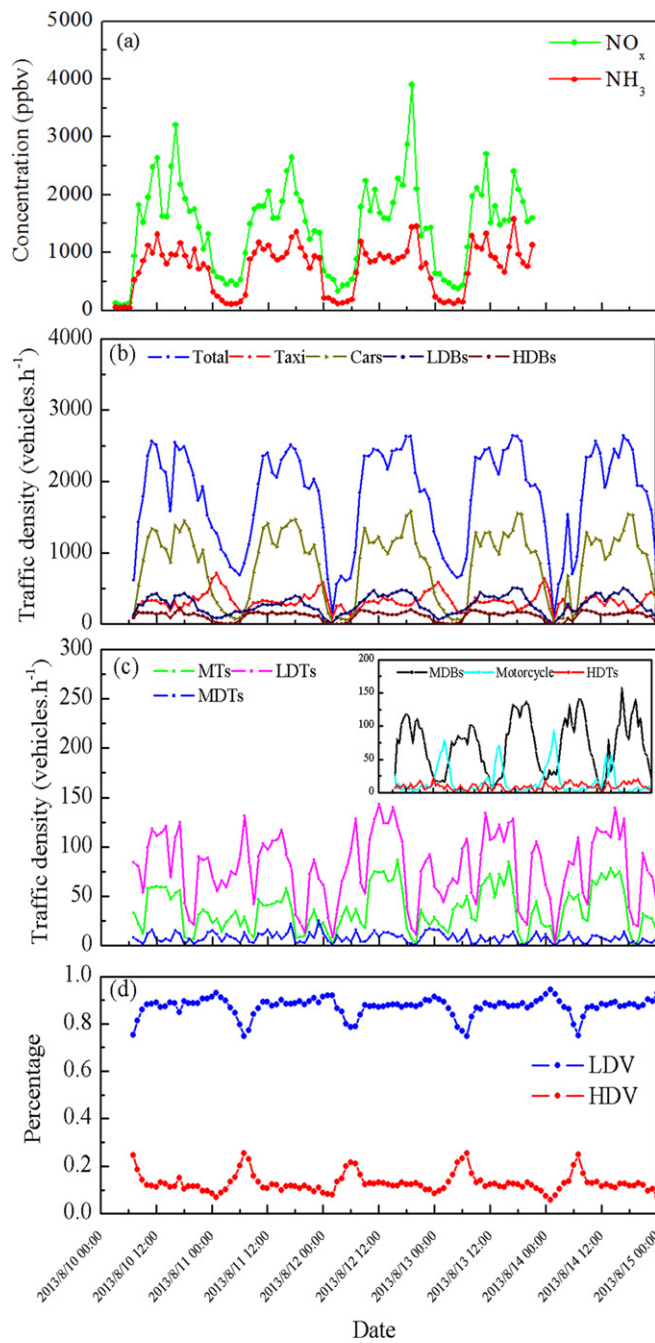


Figure 2. (a) Concentration-time plots of NO_x and NH_3 at the tunnel outlet during the sampling period with a time resolution of 1 h. (b) Profile of the total traffic density and traffic densities of taxi, cars, light-duty buses (LDBs) and heavy-duty buses (HDBs) during the sampling period. (c) Profile of traffic densities of mini-trucks (MTs), light-duty trucks (LDTs), medium-duty trucks (MDTs), heavy-duty trucks (HDTs), medium-duty buses (MDBs) and motorcycles during the sampling period. (d) Light-duty vehicles (LDV) and heavy-duty vehicles (HDV) percentages of the total traffic density during the sampling period.

consistency means, if cars and LDBs were major contributors of NH_3 as discussed below, our tunnel test results would be largely representative ones for Guangzhou.

Figure 3 shows the scatter plots of NH_3 concentrations against traffic densities of different types of vehicles. NH_3

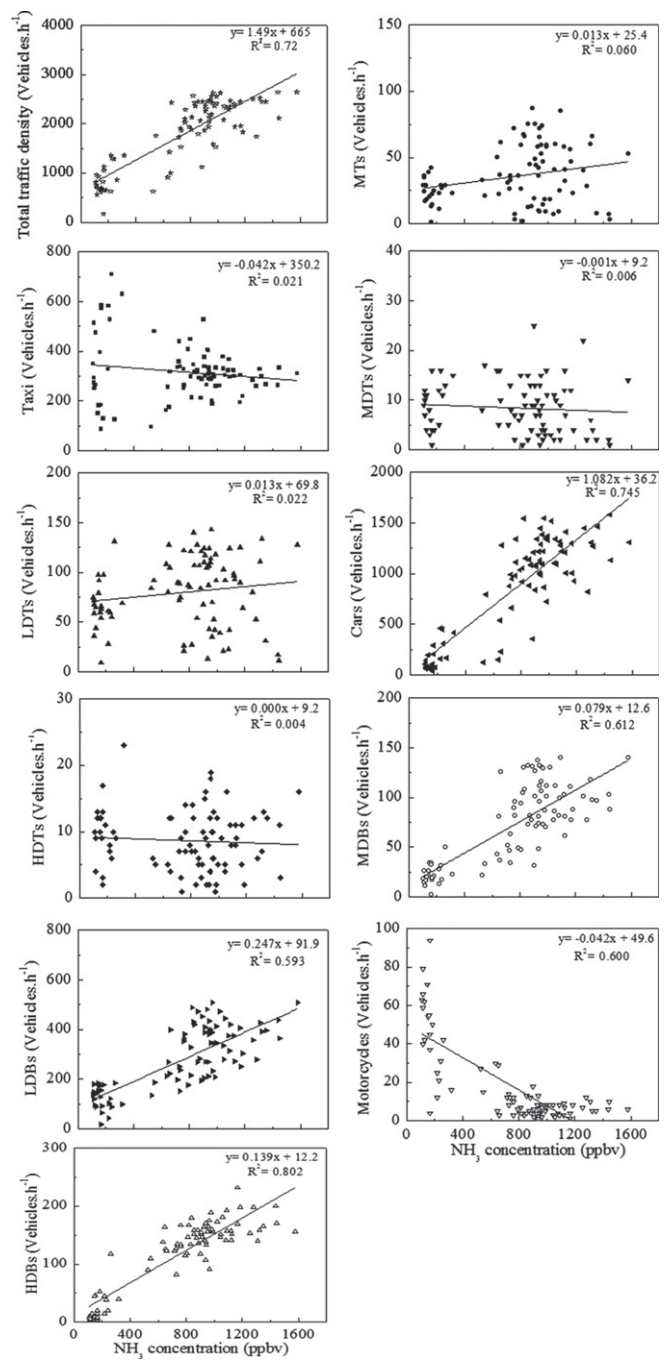


Figure 3. Scatter plots of NH_3 concentrations against traffic densities of Taxi, MTs, LDTs, MDTs, HDTs, Cars, LDBs, MDBs, HDBs and motorcycles.

concentrations show a good positive correlation with the total traffic density. Poor correlations between NH_3 concentrations and densities of diesel trucks were probably related to the negligible ammonia emission from diesel vehicles (Burgard et al 2006). Although taxi contributed about 14.3% of the total traffic in the tunnel from 10 am to 10 pm, its density was also poorly correlated with NH_3 concentration. A probable reason is that NH_3 concentrations varied with that of major NH_3 contributors like cars, and that ammonia emission from taxi was negligible as over 90% of taxis in Guangzhou were

LPG-powered instead of gasoline-powered. The negative correlation between motorcycle densities and NH₃ concentrations might be resulted from the fact that motorcycle densities peaked during nighttime when densities of major NH₃ contributors, like cars, had valleys instead. The good positive correlations ($p < 0.001$, $R^2 > 0.5$) between NH₃ concentrations and densities of cars and buses (LDBs, MDBs and HDBs) might imply that cars and buses were largely responsible for NH₃ emissions in the tunnel.

3.2. Emission factors

Light-duty vehicle emission factors were calculated by carbon balance, using the following equation the same as previous studies (Kirchstetter *et al* 1999, Kean *et al* 2000, Martins *et al* 2006):

$$E_p = \left(\frac{\Delta[P]}{\Delta[CO_2] + \Delta[CO]} \right) \cdot \left(\frac{MW_p}{MW_c} \right) \cdot w_c \cdot \rho_f, \quad (1)$$

where E_p is the emission factor of pollutant P in unit of mg kg^{-1} of fuel burned. $\Delta[P]$, $\Delta[CO_2]$ and $\Delta[CO]$ represent the increase in concentration of pollutant P , CO₂ and CO between the tunnel inlet and outlet, respectively. MW_p and MW_c are molecular weight of pollutant P and carbon, respectively. $w_c = 0.85$ is the mass fraction of carbon of gasoline fuel and ρ_f is the gasoline density (here $\rho_f = 740 \text{ g L}^{-1}$). Since in the vehicle exhausts contribution of hydrocarbons to the total carbon concentrations is known to be negligible compared to that of CO₂ (Kirchstetter *et al* 1998), hydrocarbons have been ignored in equation (1). As measured CO₂ and CO concentrations were 2 h averages for two days, NO_x and NH₃ concentrations recorded during the same time intervals at the tunnel inlet and outlet were also averaged to calculate $\Delta[P]$. As shown in figure 2(d), percentages of light-duty (LD) vehicles (cars, taxi, MTs, LDTs and LDBs) and heavy-duty (HD) vehicles (MDTs, HDTs, MDBs and HDBs) were relatively stable from 10 am to 10 pm, so data from 10 am to 10 pm were used to calculate the emission factors of NO_x and NH₃.

Given that diesel trucks are found to contribute very little to ammonia (Burgard *et al* 2006) and that gasoline powered vehicles shared an average of 88.2% in the total traffic densities in the Zhujiang tunnel, gasoline powered vehicles would be the main source of ammonia in the tunnel. Diesel trucks did contribute to CO₂ and might have different fuel efficiencies with gasoline powered vehicles. The fraction of fuel burned by light-duty gasoline vehicles is needed when calculating the ammonia emission factor. Using the fuel efficiencies of different kinds of vehicles reported by He *et al* (2005) and Huo *et al* (2012) and the fleet distribution in the tunnel, we obtain a rough estimate of 74.2% of fuel burned by light-duty gasoline vehicles. The emission factor of NH₃ is thus determined to be $2.92 \pm 0.18 \text{ g L}^{-1}$ (mean \pm 95% C.I.) when all ammonia emission is attributed to light-duty gasoline vehicles. Reported on-road or dynamometer-based NH₃ emission factors for motor vehicles in other countries ranged 88.8–503.2 mg L^{-1} (Moeckli *et al* 1996, Fraser and

Cass 1998, Kean *et al* 2000, Baum *et al* 2001, Durbin *et al* 2002, 2004, Huai *et al* 2003, Burgard *et al* 2006), less than 1/5 of that determined in this study. Recently, Carslaw and Rhys-Tyler (2013) reported an NH₃ emission factor 0.48 g L^{-1} for Euro IV passenger cars in London, and Sun *et al* (2014) observed an average on-road NH₃ emission factor $0.36 \pm 0.04 \text{ g L}^{-1}$ in California. These factors were quite near that reported by Fraser and Cass (1998) and Kean *et al* (2000).

Ammonia emission factor based on mg km^{-1} can be estimated using the fuel efficiency. Wagner *et al* (2009) estimated the 2006 average fuel consumption of cars in China to be 7.95 L/100 km and projected a 2009 new passenger car average fuel consumption of 7.87 L/100 km. Using 7.87 L/100 km as the average fuel efficiency, we obtained ammonia emission factor of $230 \pm 14 \text{ mg km}^{-1}$ (mean \pm 95% C.I.) for the light-duty gasoline vehicles. A comparison of ammonia emission factor with those from other tunnel studies is given in table 2. Also ammonia emission factor in mg km^{-1} measured in the Zhujiang tunnel was the highest among the studies (Moeckli *et al* 1996, Fraser and Cass 1998, Kean *et al* 2000, Emmenegger *et al* 2004).

Since NH₃ is present in human breath in levels ranging 100–2000 ppb (Španěl *et al* 1998, Kearney *et al* 2002), how much NH₃ could be attributed to passengers inside the vehicles? Assuming inhalation rate of 10–15 L min^{-1} for an adult, and taking the NH₃ level in human breath as its upper limit of 2000 ppb, the emission of NH₃ would be 13.7–20.3 $\mu\text{g min}^{-1}$ for an adult, quite near that of 18.7 $\mu\text{g min}^{-1}$ as reported by Ament *et al* (1999). Even with the emission rate of 20.3 $\mu\text{g min}^{-1}$, emission factor of NH₃ from human breath would be 0.16 mg km^{-1} assuming an average of five passengers per vehicle and an average vehicle speed of 45 km h^{-1} in the tunnel. This factor was negligible compared to the 230 mg km^{-1} from vehicles. Moreover, vehicles passing the tunnels had their windows closed, with a quite limited portion of NH₃ from human breath entering the tunnel through indoor/outdoor exchange. The higher gasoline sulfur levels in China may impact the NH₃ emission. As observed by Durbin *et al* (2004), NH₃ emission rates were approximately five times higher over the more aggressive US06 test cycle compared to the federal test procedure (FTP) cycle, and sulfur did not affect NH₃ emissions over the FTP, but higher NH₃ emissions were found for increasing fuel sulfur levels over the US06. Malfunctioning three-way-catalysts might be a major factor causing higher ammonia emissions. Fraser and Cass (1998) reported ammonia emission factors ranging from 67.0 to 166.6 mg km^{-1} for light-duty vehicles equipped with malfunctioning three-way-catalysts. Nevertheless, it is a question that needs further investigation whether the much higher NH₃ emission factor in this study was resulted from fuel quality, performance of catalytic converters or driving conditions.

NO_x (as NO) emission factor was determined to be $7.17 \pm 0.60 \text{ g L}^{-1}$ ($0.56 \pm 0.05 \text{ g km}^{-1}$) (mean \pm 95% C.I.) when averaged over the entire fleet in the Zhujiang tunnel. As shown in table 2, NO_x emission factor in the Zhujiang tunnel is within the range of other studies. Che *et al* (2009) estimated

Table 2. Comparison of NH₃ and NO_x emission factors (EF) with other tunnel studies.

Year	Location	NH ₃		NO _x		References
		(mg km ⁻¹)	(g L ⁻¹)	(g km ⁻¹)	(g L ⁻¹)	
2013	Zhujiang Tunnel, Guangzhou	230 ± 14	2.92 ± 0.18	0.56 ± 0.05	7.17 ± 0.60	This study
1993	Van Nuys Tunnel, California	61	0.38	—	—	Fraser and Cass (1998)
1993	Gubrist Tunnel, Switzerland	—	—	2.25	—	Stahelin <i>et al</i> (1995)
1995	Gubrist Tunnel, Switzerland	15 ± 4	—	—	—	Moeckli <i>et al</i> (1996)
1998–1999	Söderleds Tunnel, Stockholm	—	—	1.4	—	Kristensson <i>et al</i> (2004)
1999	Caldecott Tunnel, California	49 ± 3	0.48 ± 0.03	0.32 ± 0.01	3.16 ± 0.11	Kean <i>et al</i> (2000)
2000	Taipei Tunnel, Taipei	—	—	0.9 ± 0.18	—	Hwa <i>et al</i> (2002)
2002	Gubrist Tunnel, Switzerland	31 ± 4	—	—	—	Emmenegger <i>et al</i> (2004)
2005	Chung-Lian Tunnel, Taiwan	—	—	0.73 ± 0.15	—	Chiang <i>et al</i> (2007)
2006	Hsuehshan Tunnel, Taiwan	—	—	downslope: 0.15 ± 0.07 upslope: 0.33 ± 0.17	—	Chang <i>et al</i> (2009)
2009	Loma Larga Tunnel, Monterey	—	—	0.11 ± 0.07	4.7 ± 2.1	Mancilla <i>et al</i> (2012)

a NO_x emission factor of 1.40 g km⁻¹ for light-duty gasoline vehicles in 2006 in the PRD region using MOBILE and PART5 model, and Liao *et al* (2011), using COPERT IV model, estimated a NO_x emission factor of 0.51 g km⁻¹ for light-duty gasoline vehicles in Guangzhou in 2008. Our NO_x emission factor was quite near that by Liao *et al* (2012) but less than half of that by Che *et al* (2009).

3.3. Implications

The most comprehensive NH₃ emission inventory for on-road mobile source in the PRD region was recently compiled by Zheng *et al* (2012). This inventory, however, was based on the emission factors taken from the Emission Inventory Improvement Program (EIIP) by Reo *et al* (2004), which were 63.2, 4.2, 28.0, 16.8, and 7.0 mg km⁻¹ for light-duty gasoline, light-duty diesel, heavy-duty gasoline, heavy-duty diesel vehicles, and motorcycles, respectively. They obtained NH₃ emission of 4.9 kt yr⁻¹, or 2.5% of the total NH₃ emissions, from on-road mobile source in the PRD region in 2006. If we just replace the emission factor for light-duty gasoline vehicles with 230 mg km⁻¹ determined in this study, NH₃ emission from on-road mobile sources by Zheng *et al* (2012) would then reach 16.8 kt yr⁻¹ and account for 8.1% of the total NH₃ emission in the region, comparable to 10% obtained by Yao *et al* (2013) near a highway with the highest traffic density in Canada. As all newly manufactured light-duty vehicles in China are equipped with TWC for exhaust control, and meanwhile in recent decades vehicle population in the PRD region is increasing rapidly at a rate of over 10% per year (Che *et al* 2011), NH₃ emission from vehicle exhausts

would become increasingly important. Applying this emission factor to the vehicle population in 2012 in the PRD region, for NH₃ emission from on-road mobile source we would get an estimate of 44.2 kt yr⁻¹, which is about 2.6 times that in 2006. If the total agricultural NH₃ emissions in 2012 were the same as that in 2006 as estimated by Zheng *et al* (2012), NH₃ emission from vehicle exhausts would occupy a share as high as 18.8% in the total NH₃ emission. In urban areas where on-road vehicle density is relatively higher and there is much less agricultural activity, NH₃ emission from on-road vehicles would be more distinctive and thus greatly influence the near-surface atmospheric chemistry. Further studies are needed to make clear the reason for the much higher emission factors determined from our tunnel tests in Guangzhou.

Acknowledgments

This study was supported by National Natural Science Foundation of China (Project No. 41025012/41121063), Strategic Priority Research Program of the Chinese Academy of Sciences (Grant No. XDB05010200) and NSFC-Guangdong Joint Funds (U0833003).

References

Ament W, Huizenga J R, Kort E, van der Mark T W, Grevink R G and Verkerke G J 1999 Respiratory ammonia output and blood ammonia concentration during incremental exercise *Int. J. Sports. Med.* **20** 71–7

- Asman W A H 1998 Factors influencing local dry deposition of gases with special reference to ammonia *Atmos. Environ.* **32** 415–21
- Battye W, Aneja V P and Roelle P A 2003 Evaluation and improvement of ammonia emissions inventories *Atmos. Environ.* **37** 3873–83
- Baum M M, Kiyomiya E S, Kumar S, Lappas A M, Kapinus V A and Lord H C 2001 Multicomponent remote sensing of vehicle exhaust by dispersive absorption spectroscopy. 2. direct on-road ammonia measurements *Environ. Sci. Technol.* **35** 3735–41
- Bouwman A F, Lee D S, Asman W A H, Dentener F J, Van Der Hoek K W and Olivier J G J 1997 A global high-resolution emission inventory for ammonia *Glob. Biogeochem. Cycles* **11** 561–87
- Bradrow R L and Stump F D 1977 Unregulated emissions from three-way catalyst cars *SAE Technical Paper* No 770369
- Burgard D A, Bishop G A and Stedman D H 2006 Remote sensing of ammonia and sulfur dioxide from on-road light duty vehicles *Environ. Sci. Technol.* **40** 7018–22
- Cadle S H and Mulawa P A 1980 Low-molecular-weight aliphatic amines in exhaust from catalyst-equipped cars *Environ. Sci. Technol.* **14** 718–23
- Carslaw D C and Rhys-Tyler G 2013 New insights from comprehensive on-road measurements of NO_x, NO₂ and NH₃ from vehicle emission remote sensing in London, UK *Atmos. Environ.* **81** 339–47
- Chan C K and Yao X H 2008 Air pollution in mega cities in China *Atmos. Environ.* **42** 1–42
- Chang S C, Lin T H and Lee C T 2009 On-road emission factors from light-duty vehicles measured in hshuehsan tunnel (12.9 km), the longest tunnel in Asia *Environ. Monit. Assess.* **153** 187–200
- Che W W, Zheng J Y and Zhong L J 2009 Mobile source emission characteristics and contributions in the pearl river delta region *Res. Environ. Sci.* **22** 456–61
- Che W, Zheng J, Wang S, Zhong L and Lau A 2011 Assessment of motor vehicle emission control policies using model-3/CMAQ model for the pearl river delta region, China *Atmos. Environ.* **45** 1740–51
- Chiang H L, Hwu C S, Chen S Y, Wu M C, Ma S Y and Huang Y S 2007 Emission factors and characteristics of criteria pollutants and volatile organic compounds (VOCs) in a freeway tunnel study *Sci. Total Environ.* **381** 200–11
- Chitjian M, Koizumi J, Botsford C W, Mansell G and Winegar E 2000 Final 1997 gridded ammonia emission inventory update for the south coast air basin *Final report to the south coast air quality management district*
- Chow J C, Watson J G, Fujita E M, Lu Z, Lawson D R and Ashbaugh L L 1994 Temporal and spatial variations of PM_{2.5} and PM₁₀ aerosol in the southern California air quality study *Atmos. Environ.* **28** 2061–80
- Durbin T D et al 2004 The effect of fuel sulfur on NH₃ and other emissions from 2000–2001 model year vehicles *Atmos. Environ.* **38** 2699–708
- Durbin T D, Wilson R D, Norbeck J M, Miller J W, Huai T and Rhee S H 2002 Estimates of the emission rates of ammonia from light-duty vehicles using standard chassis dynamometer test cycles *Atmos. Environ.* **36** 1475–82
- Edgerton E S, Saylor R D, Hartsell B E, Jansen J J and Alan Hansen D 2007 Ammonia and ammonium measurements from the southeastern United States *Atmos. Environ.* **41** 3339–51
- Emmenegger L, Mohn J, Sigrist M, Marinov D, Steinemann U, Zumsteg F and Meier M 2004 Measurement of ammonia emissions using various techniques in a comparative tunnel study *Int. J. Environ. Pollut.* **22** 326–41
- Fraser M P and Cass G R 1998 Detection of excess ammonia emissions from in-use vehicles and the implications for fine particle control *Environ. Sci. Technol.* **32** 1053–7
- Guangdong Provincial Bureau of Statistics (GPBS) and Guangdong Survey Office of National Bureau of Statistics (GSONBS) 2013 *Guangdong Statistical Yearbook*, (Beijing: China Statistics Press)
- Hansen D A, Edgerton E S, Hartsell B E, Jansen J J, Kandasamy N, Hidy G M and Blanchard C L 2003 The southeastern aerosol research and characterization study: part 1—overview *J. Air Waste Manage. Assoc.* **53** 1460–71
- He K, Huo H, Zhang Q, He D, An F, Wang M and Walsh M P 2005 Oil consumption and CO₂ emissions in China's road transport: current status, future trends, and policy implications *Energy Policy* **33** 1499–507
- He K, Yang F, Ma Y, Zhang Q, Yao X, Chan C K, Cadle S, Chan T and Mulawa P 2001 The characteristics of PM_{2.5} in Beijing, China *Atmos. Environ.* **35** 4959–70
- He L Y, Hu M, Zhang Y H, Huang X F and Yao T T 2008 Fine particle emissions from on-road vehicles in the zhujiang tunnel, China *Environ. Sci. Technol.* **42** 4461–6
- Heeb N V, Saxer C J, Forss A-M and Brühlmann S 2006 Correlation of hydrogen, ammonia and nitrogen monoxide (nitric oxide) emissions of gasoline-fueled euro-3 passenger cars at transient driving *Atmos. Environ.* **40** 3750–63
- Heeb N V, Saxer C J, Forss A-M and Brühlmann S 2008 Trends of NO_x, NO₂, and NH₃-emissions from gasoline-fueled euro-3- to euro-4-passenger cars *Atmos. Environ.* **42** 2543–54
- Huai T, Durbin T D, Miller J W, Pisano J T, Sauer C G, Rhee S H and Norbeck J M 2003 Investigation of NH₃ emissions from new technology vehicles as a function of vehicle operating conditions *Environ. Sci. Technol.* **37** 4841–7
- Huang X, Song Y, Li M, Li J, Huo Q, Cai X, Zhu T, Hu M and Zhang H 2012 A high-resolution ammonia emission inventory in China *Glob. Biogeochem. Cycles* **26** GB1030
- Huo H, He K, Wang M and Yao Z 2012 Vehicle technologies, fuel-economy policies, and fuel-consumption rates of chinese vehicles *Energy Policy* **43** 30–6
- Hwa M-Y, Hsieh C-C, Wu T-C and Chang L-F W 2002 Real-world vehicle emissions and VOCs profile in the taipei tunnel located at Taiwan taipei area *Atmos. Environ.* **36** 1993–2002
- Ianniello A, Spataro F, Esposito G, Allegrini I, Hu M and Zhu T 2011 Chemical characteristics of inorganic ammonium salts in PM_{2.5} in the atmosphere of Beijing (China) *Atmos. Chem. Phys.* **11** 10803–22
- Kean A J, Harley R A, Littlejohn D and Kendall G R 2000 On-road measurement of ammonia and other motor vehicle exhaust emissions *Environ. Sci. Technol.* **34** 3535–9
- Kean A J, Littlejohn D, Ban-Weiss G A, Harley R A, Kirchstetter T W and Lunden M M 2009 Trends in on-road vehicle emissions of ammonia *Atmos. Environ.* **43** 1565–70
- Kearney D, Hubbard T and Putnam D 2002 Breath ammonia measurement in helicobacter pylori infection *Dig. Dis. Sci.* **47** 2523–30
- Kirchstetter T W, Harley R A, Kreisberg N M, Stolzenburg M R and Hering S V 1999 On-road measurement of fine particle and nitrogen oxide emissions from light- and heavy-duty motor vehicles *Atmos. Environ.* **33** 2955–68
- Kirchstetter T W, Singer B C, Harley R A, Kendall G R and Traverse M 1998 Impact of California reformulated gasoline on motor vehicle emissions. 1. mass emission rates *Environ. Sci. Technol.* **33** 318–28
- Kirkby J et al 2011 Role of sulphuric acid, ammonia and galactic cosmic rays in atmospheric aerosol nucleation *Nature* **476** 429–33
- Kristensson A, Johansson C, Westerholm R, Swietlicki E, Gidhagen L, Wideqvist U and Vesely V 2004 Real-world traffic emission factors of gases and particles measured in a road tunnel in Stockholm, Sweden *Atmos. Environ.* **38** 657–73
- Liao H B, Yu Z, Zhou B, Liu Y H, Bi S Y, Cai M and Luo W L 2012 Characteristics of motor vehicle exhaust emission in Guangzhou *Environ. Sci. Technol.* **35** 134–8

- Livingston C, Rieger P and Winer A 2009 Ammonia emissions from a representative in-use fleet of light and medium-duty vehicles in the California south coast air basin *Atmos. Environ.* **43** 3326–33
- Mancilla Y, Araizaga A E and Mendoza A 2012 A tunnel study to estimate emission factors from mobile sources in Monterrey, Mexico *J. Air Waste Manage. Assoc.* **62** 1431–42
- Martins L D et al 2006 Emission factors for gas-powered vehicles traveling through road tunnels in são paulo, Brazil *Environ. Sci. Technol.* **40** 6722–9
- McCulloch R B and Shendrikar A D 2000 Concurrent atmospheric ammonia measurements using citric-acid-coated diffusion denuders and a chemiluminescence analyzer *Atmos. Environ.* **34** 4957–8
- Meng Z Y, Lin W L, Jiang X M, Yan P, Wang Y, Zhang Y M, Jia X F and Yu X L 2011 Characteristics of atmospheric ammonia over Beijing, China *Atmos. Chem. Phys.* **11** 6139–51
- Moeckli M A, Fierz M and Sigrist M W 1996 Emission factors for ethene and ammonia from a tunnel study with a photoacoustic trace gas detection system *Environ. Sci. Technol.* **30** 2864–7
- Ortega I K, Kurtén T, Vehkamäki H and Kulmala M 2008 The role of ammonia in sulfuric acid ion induced nucleation *Atmos. Chem. Phys.* **8** 2859–67
- Pathak R K, Wu W S and Wang T 2009 Summertime PM_{2.5} ionic species in four major cities of China: nitrate formation in an ammonia-deficient atmosphere *Atmos. Chem. Phys.* **9** 1711–22
- Pearson J and Stewart G R 1993 The deposition of atmospheric ammonia and its effects on plants *New. Phytol.* **125** 283–305
- Pierson W R and Brachaczek W W 1983 Emissions of ammonia and amines from vehicles on the road *Environ. Sci. Technol.* **17** 757–60
- Pinder R W, Adams P J and Pandis S N 2007 Ammonia emission controls as a cost-effective strategy for reducing atmospheric particulate matter in the eastern United States *Environ. Sci. Technol.* **41** 380–6
- Roe S M, Spivey M D, Lindquist H C, Thesing K B, Strait R P and Pechan E H and Associates Inc. 2004 Estimating ammonia emissions from anthropogenic nonagricultural sources *US Emission Inventory Improvement Program (EIIP)*
- Seinfeld J H and Pandis S N 1998 *Atmospheric Chemistry and Physics: From Air Pollution to Climate Change*, (New York: Wiley) pp 74–75, 1056–7
- Španěl P, Davies S and Smith D 1998 Quantification of ammonia in human breath by the selected ion flow tube analytical method using H₃O⁺ and O₂⁺ precursor ions *Rapid Commun. Mass Spectrom.* **12** 763–6
- Staehelin J et al 1995 Emission factors from road traffic from a tunnel study (gubrist tunnel, Switzerland). part I: concept and first results *Sci. Total Environ.* **169** 141–7
- Sun K, Tao L, Miller D J, Khan M A and Zondlo M A 2014 On-road ammonia emissions characterized by mobile, open-path measurements *Environ. Sci. Technol.* **48** 3943–50
- Sutton M A, Dragosits U, Tang Y S and Fowler D 2000 Ammonia emissions from non-agricultural sources in the UK *Atmos. Environ.* **34** 855–69
- US EPA 2007 1970–2006 average annual emissions *All Criteria Pollutants in MS Excel*, Accessed 1 February 2008
- Wagner D V, An F and Wang C 2009 Structure and impacts of fuel economy standards for passenger cars in China *Energy Policy* **37** 3803–11
- Wang X M, Ding X, Fu X X, He Q F, Wang S Y, Bernard F, Zhao X Y and Wu D 2012 Aerosol scattering coefficients and major chemical compositions of fine particles observed at a rural site in the central pearl river delta, south China *J. Environ. Sci.* **24** 72–7
- Yang F, Tan J, Zhao Q, Du Z, He K, Ma Y, Duan F, Chen G and Zhao Q 2011 Characteristics of PM_{2.5} speciation in representative megacities and across China *Atmos. Chem. Phys.* **11** 5207–19
- Yao X, Hu Q, Zhang L, Evans G J, Godri K J and Ng A C 2013 Is vehicular emission a significant contributor to ammonia in the urban atmosphere? *Atmos. Environ.* **80** 499–506
- Yi Z, Wang X, Sheng G, Zhang D, Zhou G and Fu J 2007 Soil uptake of carbonyl sulfide in subtropical forests with different successional stages in south China *J. Geophys. Res.* **112** D08302
- Zhang Q, He K and Huo H 2012a Policy: cleaning China's air *Nature* **484** 161–2
- Zhang Y L et al 2012b Aromatic hydrocarbons as ozone precursors before and after outbreak of the 2008 financial crisis in the pearl river delta region, south China *J. Geophys. Res.* **117** D15306
- Zheng J Y, Yin S S, Kang D W, Che W W and Zhong L J 2012 Development and uncertainty analysis of a high-resolution NH₃ emissions inventory and its implications with precipitation over the pearl river delta region, China *Atmos. Chem. Phys.* **12** 7041–58