

PAPER • OPEN ACCESS

Research of Downhole Instructions Decoding with Variable Drilling Fluid Displacement

To cite this article: Aiqing Huo and Yuyan Yang 2020 *J. Phys.: Conf. Ser.* **1617** 012084

View the [article online](#) for updates and enhancements.

You may also like

- [Challenges in Scientific Data Communication from Low-mass Interstellar Probes](#)
David G. Messerschmitt, Philip Lubin and Ian Morrison
- [Current situation and key technology analysis of downhole blow-out preventer](#)
Guo Wang, Zhihua Wang, Xinming Niu et al.
- [Performance evaluation of aeronautical uplink/downlink free-space optical communication system with adaptive optics over gamma-gamma turbulence channel](#)
Muhsin Caner Gökçe, Yalçın Ata and Yahya Baykal



ECS
The
Electrochemical
Society
Advancing solid state &
electrochemical science & technology

DISCOVER
how sustainability
intersects with
electrochemistry & solid
state science research

Research of Downhole Instructions Decoding with Variable Drilling Fluid Displacement

Aiqing Huo¹, Yuyan Yang²

School of Electronic Engineering, Xi'an Shiyu University, Xi'an, Shaanxi, 710000, China

¹huoaiqing@sina.com

²2682125672@qq.com

Abstract. This paper studied a downlink communication mode in which the effective downhole control instruction was generated by the use of drilling fluid pump displacement to format three descending and three ascending pulse instruction encoding. The principle of the downlink communication was introduced. The encoding idea of the downlink instruction code with 5-bit pulse was described. This downlink code was used to compose the corresponding control instruction which includes the information of the tool face angle and the guide force percentage. The downhole pulse widths were recognized by using STM32 as a micro control chip. The corresponding control commands were identified through the development of the software in the downhole drilling tool. Laboratory ground experiments demonstrated the feasibility of this downlink transmission mode by using variable drilling fluid displacement and the achievability of instruction decoding software.

1. Introduction

The rotary steering drilling tool is a sophisticated technique which involves many subjects and advanced technologies. It is called “drilling missile and guidance technology”. Its core technique is mainly composed of ground monitoring system, downhole bias-oriented control and execution tool and two-way communication system [1-3]. Downlink communication is the key technology to realize the closed control of rotary steerable drilling system. Therefore, transmitting control command from the ground to the downhole is the most important research for achieving automatic closed directional drilling.

There have been numerous research in this area at home and abroad. Engelder proposed to monitor the rotation angle of drill string or rotation rate of drill string using tilt meter and three-axis magnetometer [4]. In the aspect of patent application, US7298285 [5] and US2006225920 [6], downhole signal reception is achieved by monitoring the rate changes in rotor, which is driven by a mud-powered engine in the downhole tool. Xinsheng Fu at Xi'an Shiyu University decoded the encoded signals, which were sent from the downhole, through the measurement of the vibrational signal at the drill bit [7]. Most of the issues are caused by the vulnerable output signals from the downhole sensors due to the restrictions from the geological formation parameters, or to the complexity of the physical structures [8]. Considering signal transmission mode and the factors of the communication rate, depth and reliability of the downlink communication, etc., the drilling fluid pulse transmission is selected as a downlink information transmission protocol [9]. As a turbo-motor-drive is built in as a part of the rotary drilling tool, there is no need to add additional sensors for downlink communication [10-11]. Thus combining these two ideas, a improvement principle was proposed by using of drilling fluid pump displacement to



format three descending and three ascending pulse instruction encoding. Meanwhile, the encoding instructions on the ground were given and the instructions decoding software underground in the downhole drilling tool were designed in this paper.

2. Basic principle of downlink communication

The signal transmission system with drilling fluid as the transmission medium on the ground is mainly made up of the ground monitoring system controlling the pulse valve, the drill string used as the transmission channel and the receiving device in the downhole electronic storehouse.

The ground transmission system changes the drilling fluid displacement in the drill string by controlling the switch of the pulse valve. When the pulse valve is opened, the displacement of the drilling fluid in the drill string is reduced to 20% of the full displacement, and the change of the displacement leads to the voltage and frequency of the downhole turbine motor is changed. The downhole hardware processing circuit and the decoding software recognize the pulse variation of the voltage and interpret it as a control instruction code. Thus the large closed-cycle control from the ground monitoring system to the downhole drilling tool system is realized.

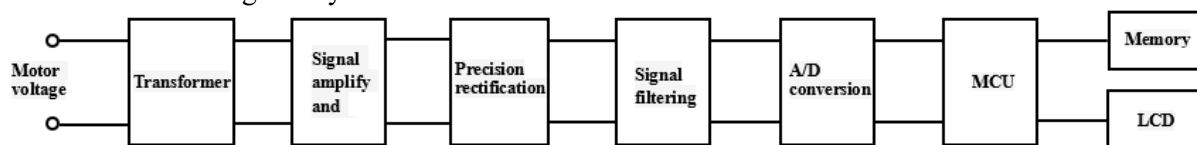


Figure 1. Structure diagram of downhole turbine motor voltage detection.

To implement the collection of the output voltage of the turbo motor, it is necessary to amplify, detect, rectify, filter and A/D convert to the voltage output signal [12]. The MCU converts the acquired digital signal into the corresponding control instruction code, the specific circuit structure diagram shown in Figure 1. STM32F103RCT6 chip is used as MCU in the Figure 1.

3. Downward Instruction Encoding

In order to realize the control of downhole drilling tools and to adjust the tool face angle and the guiding force percentage of the downhole drilling tools according to the expected requirements, the downlink instructions must be coded.

The three descending and three ascending encoding instructions [13] for drilling fluid displacement changed are shown in Figure 2. The receiving device can get the pulse width by the decoding software, pulse width is explained by five control information code bits, the first three bits represents the tool face angle, the fourth represents the guide force percentage, the last one is the parity bit.

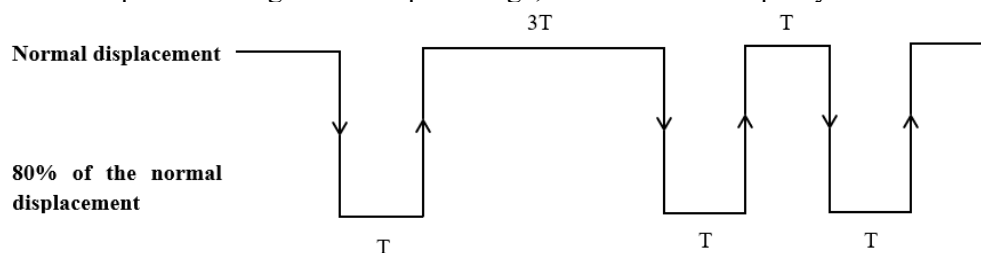


Figure 2. An encoding instruction.

T is the minimum pulse width in the drilling fluid encoding instructions, which depends on the attenuation period of the drilling fluid fluctuation in the borehole, and the T is generally agreed to be 30s. Each pulse width is integer m times than T . In addition, in order to improve the sensitivity of the action of the downhole control mechanism and to ensure the accuracy of the test, it is stipulated that the total time of all the pulse widths of an effective instruction does not exceed nT (n is an integer), and each pulse width does not exceed kT , the biggest k is 9, $k < n$. If the instruction recognized by the downhole receiving device meets the above conditions, it is regarded as a valid instruction.

4. Software design of downhole instruction decoding

Simple and efficient decoding software is need to design so as to decode the downward instruction accurately. In the scheme, the software programs perform the main tasks—the output voltage is collected by the driving AD chip, the voltage threshold range is set for pulse width, the control algorithm is gained from program codes, the LCD screen is drove to display the instruction codes and the instruction codes are stored in I²C. Therefore, the contents about the pulse width identification, the count value reading, and the error instruction recognition will be presented in this section.

4.1. Three-descending and three-ascending instruction decoding

The normal displacement and the pressure of drilling fluid are not a fixed value as different drilling technical parameters and casing dimensions. Thus, it is necessary to confirm a threshold voltage V of the turbine motor output corresponding to the full drilling fluid displacement, which is compared to the subsequent sample value V_i continually. The decoding software will be recognize it as a correct instruction when the change of two sampling values is more than $20\%V$ meanwhile less than $60\%V$. The threshold identification flow chart is shown in Figure 3.

The control instruction code is composed of corresponding number of 5-bit pulse width of three-descending and three-ascending, so the core of software design is to recognize the 5-bit pulse width. The software program compares the output voltage V_i from A/D with the threshold voltage V . The first descending edge arrives only when $V_i = 80\%V$ ($\pm 5\%$ tolerance amplitude is allowed), that indicates the pulse output will be a low level. The idea of capturing low level pulse width is as follows: firstly, set TIM2_CH1 to capture the falling edge, waiting for the descending edge to capture the interruption. When the interruption of descending edge is captured, the sixth bit of the CAPTURE_STA register is will be set to 1, which indicates that the low level is captured, then to start timer to count. Once the timer counter overflowing, the CAPTURE_STA register is used to count. At the same time, the TIM2_CH1 is set to capture the rising edge. The seventh bit of CAPTURE_STA is set to 1, which indicates that a low level is captured successfully. And the eighth bit of CAPTURE_STA is set to 1 by hardware. The flag is captured and the capture value of the timer is read to the CAPTURE_VAL register. Finally, the falling edge is set to return to the initial state. (Note: the timer is 16bits, the sampling frequency is set to 1 KHZ; CAPTURE_VAL register is 16 bits, maximum count is 65535; CAPTURE_STA register is 8 bits and the top six is overflow times for storage, the 7th is to capture low-level flag bit, the 8th is to capture complete flag bit). When $V_i = 100\%V$ (allows $\pm 5\%$ deviation amplitude), it indicates that the first ascending edge arrives and pulse output is a high level. The start timer TIM5_CH1 captures the high pulse width. The capture process is not repeated as described above.

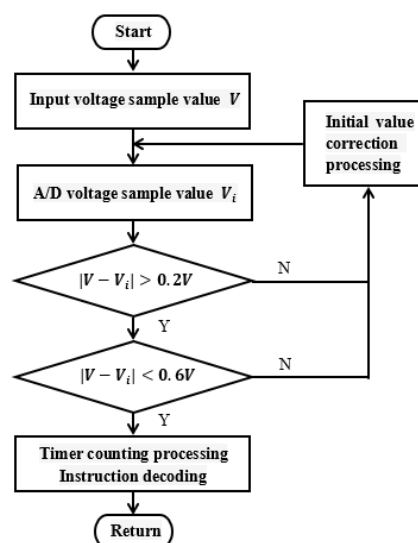


Figure 3. Threshold identification flow chart.

4.2. Pulse widths value obtaining

For the timer to capture the count value, operation should be carried out by (1), where $CAPTURE_STA \& 0X3F$ is the number of overflows and $CAPTURE_VAL$ is the capture value of the timer. Because the sampling frequency is 1KHZ, the calculation time is milliseconds, divided by 1000 for seconds. The numerical value is converted into the corresponding instruction code by the minimum period T , and the pulse width instruction is obtained. Since there is an error in this calculation, it is necessary to use the count value to find the minimum period. If the remainder is greater than $2/3$ of T , the command value is incremented by 1, otherwise the command value will not change.

$$t = \frac{(CAPTURE_STA \& 0X3F) \times 65535 + CAPTURE_VAL}{1000} \quad (1)$$

4.3. Error instruction identification

Due to the complex operating conditions in the underground, the signal is susceptible to interference in the transmission channel, resulting in abnormal drilling fluid pressure change, which lead to too narrow or too wide pulse width [14]. If the received pulse width time is $T' < T$, the pulse width is too narrow; if the received pulse width time is $T' > 9T$, the pulse width is too wide. All these cases are judged to be wrong instructions for processing. When receiving three-descending and three-ascending of voltage pulse signal, it needs to start two timers, one is used to capture the normal pulse width, another one is to capture the interference pulse signal. If the interference signal time T' is much smaller than the minimum period T , it is considered as a peak interference. If the signal time T' is more than $9T$, it is considered as a wrong instruction which caused by the anomaly pressure in the hole.

After the instruction is successfully received, the algorithm is used to integrate the single instruction code into a 5-bit control instruction code. The control instruction is stored to 24C02 through I²C bus. Then the main CPU calls the stored control instruction to complete the control of the drilling tool, furthermore to realize the downlink communication.

5. Ground Experiment

To simulate drilling fluid displacement changing, frequency converter is used to control the rotation of the drag motor in the ground simulation experiments. Moreover, the turbine motor is connected with the drag motor through the couple axle, so the change frequency of the converter is equal to the change of drilling fluid displacement, at the same time to change the output voltage of turbine motor. For example, when the frequency converter is 50Hz, it is equivalent to the normal pump displacement, and 40Hz is equivalent to 80% of the pump displacement. The specific ground experimental platform is shown in Figure 4.

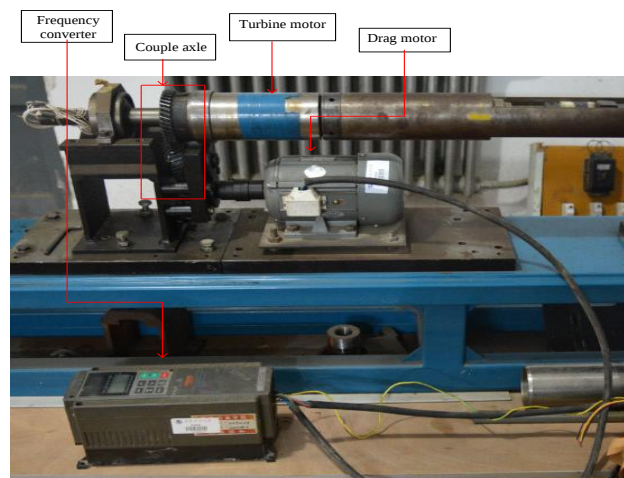


Figure 4. Ground simulation experiment platform.

A series number of 13111 as an instruction code is sent on the ground simulation experiment platform, and the signal received by the turbine motor is shown in Figure 5. The AD converter converts analog voltage into digital signal, which are interpreted by the instruction recognition program as the count of the pulse width to form the corresponding 5-bit control instruction code. The STM32 decode the pulse width consisting of 5-bit of instruction into 13111, where the first 3-bit in the instruction code 131 is represent the tool face angle 60° , the 4th bit 1 is represent the steering force 100%. The experimental results show that the software decoding can effectively identify the three descending and three ascending of 5-bit instruction code.

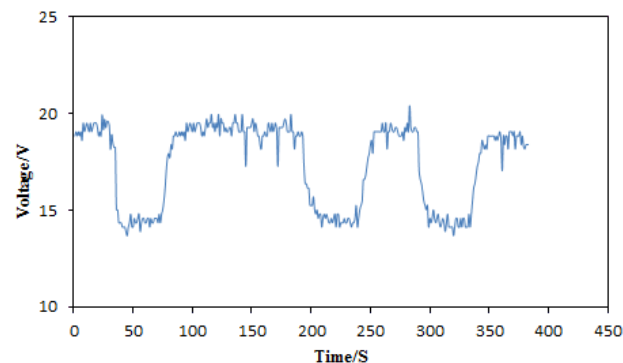


Figure 5. Downlink received instruction.

6. Conclusions

(1) It is a simple and attainable approach to use drilling fluid pulse with three-descending and three-ascending encoded instructions for downlink signal transmissions in a rotary steerable drilling system.

(2) Falling edges and rising edges are captured by using two groups of timer and 5 pulses width are obtained by using a timer counting method, so that control instructions are identified in the downhole drilling tool.

(3) Software programs are designed to judge and deal with error instructions encoding with spike disturbance, delay interference etc.

Acknowledgments

This paper was supported by Key Laboratory Scientific Research Project of Shaanxi Provincial Department of Education(17JS108); General project of Shaanxi Provincial Department of Science and Technology-Industrial field(2020GY-152).

References

- [1] Zhang Shaohuai. (2003) New progress and development direction of modern steering drilling techniques[J]. Journal of Petroleum Science, 24(3): 82-85.
- [2] Li Fengfei, Jiang Quanshi, Li Hanxing, Gao Deli. (2012) Research on Signal Transmission System of Rotary Guided Drilling Tool[J]. China's Offshore Oil and Gas, 24(6): 45-47.
- [3] Tang Nan, Huo Aiqing, Wang Yuelong, Cheng Weibin. (2010) Development of downward communication receiving function in rotary steerable drilling system[J]. Journal of Petroleum Science, 31(1): 157-160.
- [4] Engelder. (1998) Method and apparatus for telemetry while drilling by changing drill string rotation angel or speed[P]. United states Patent: 4763258. 1998-08-09.
- [5] Moriarty K. (2007) Rotary downlink system[P]. U.S, 7298285. 2007-11-20.
- [6] Treviranus, Joachim, et al. (2006) Method and apparatus for downlink communication[P]. U.S 20060225920. 2006-10-12.
- [7] Zhou Jing, Fu Xinsheng. (2005) Communication of information from surface to downhole by sensors sensitive to the vibration of drill stem. Acta Petrolei Sinica. Beijing. pp. 104-107.

- [8] Liu Xiushan, Su Yinao. Design of Ground Signal Transmission System[J]. (2000) Journal of Petroleum Science, 21(6): 88-92.
- [9] Huo Aiqing, Tang Nan, Wang Yuelong, Cheng Weibin. (2013) Study of Downlink Instruction Transmission Receiver Based on Turbo Engine in Steerable Drilling[J]. Microcomputer Motor, 41(9): 26-28.
- [10] Huo Aiqing, He Yuyao, Wang Yuelong, Tang Nan, Cheng Weibin. (2010) Key Technology Research of Downward Communication Receiving System in Rotary Steerable Drilling. 2010 2nd International Conference on Computer Engineering and Technolog. Chengdu. pp. 413-416.
- [11] Huo Aiqing, He Yuyao, Wang Yuelong, Tang Nan, Cheng Weibin. (2010) Study of Downward Communication Receiver in Rotary Steerable Drilling Tool Based on Turbine Generator. Proceedings of the 29th Chinese Control Conference. Beijing. pp. 4210-4213.
- [12] Wang Yuelong, Lv Jinxing, Huo Aiqing, Tang Nan. (2010) Accurate Measurement System for Downhole Turbine Electrical Machines[J]. Microcomputer Motor, 11: 24-26.
- [13] Li Qi, Peng Yuanchao, Zhang Shaohuai, Liu Zhikun. (2007) Study on signal transmission technique in rotary steering drilling[J]. Journal of Petroleum Science, 28(4): 108-111.
- [14] Zhao Qi, Huo Aiqing, Tang Nan. (2010) Design of Receiving Software of Downward Control Commands of Steering Drilling Tool Using Downhole Motor[J]. Computer Measurement and Control, 18(12): 2898-2900.