PAPER • OPEN ACCESS

Increasing the efficiency of solar thermal panels

To cite this article: M Dobrnjac et al 2016 IOP Conf. Ser.: Mater. Sci. Eng. 144 012011

View the article online for updates and enhancements.

You may also like

- Innovative Ideas in Science 2016
- <u>Big Data as the basis for the innovative</u> <u>development strategy of the Industry 4.0</u> T Latinovic, D Preradovi, C R Barz et al.
- Intelligent traffic control system using PLC C Barz, C Todea, T Latinovic et al.





DISCOVER how sustainability intersects with electrochemistry & solid state science research



This content was downloaded from IP address 18.119.107.96 on 27/04/2024 at 04:09

Increasing the efficiency of solar thermal panels

M Dobrnjac¹, T Latinović¹, S Dobrnjac² and P Živković³

¹University of Banja Luka, Faculty of Mechanical Engineering, Stepe Stepanovica St. 71, 78000 Banja Luka, Bosnia and Herzegovina

²Projekt SC, Veselina Maslese St. 1/IV, 78000 Banja Luka, Bosnia and Herzegovina ³University of Nis, Faculty of Mechanical Engineering, Aleksandra Medvedeva St. 14, 18000 Niš, Republic of Serbia

E-mail: dobrnjac.mirko@gmail.com

Abstract. The popularity of solar heating systems is increasing for several reasons. These systems are reliable, adaptable and pollution-free, because the renewable solar energy is used. There are many variants of solar systems in the market mainly constructed with copper pipes and absorbers with different quality of absorption surface. Taking into account the advantages and disadvantages of existing solutions, in order to increase efficiency and improve the design of solar panel, the innovative solution has been done. This new solar panel presents connection of an attractive design and the use of constructive appropriate materials with special geometric shapes. Hydraulic and thermotechnical tests that have been performed on this panel showed high hydraulic and structural stability. Further development of the solar panel will be done in the future in order to improve some noticed disadvantages.


1. Introduction

The popularity of solar heating systems is increasing for several reasons. These systems are reliable, adaptable and pollution-free, because the renewable solar energy is used. The solar thermal panels have been used in solar installations for preparing hot water, for supplementary heating of the different facilities, as a support to classic heating system, for heating of water in swimming pools, etc.

The reason why solar energy has not been exploited sufficiently so far can certainly be found in its relatively low density compared to conventional sources, and in the fact that for its "capturing" and conversion relatively big solar surface should be installed which requires significant investment [1]. This is why this investment is a privilege of richer individuals and countries, which however, after a relatively short repayment period, provides free of charge and clean energy throughout its useful life. The ways of "capturing" solar energy are diverse [2]. This paper focuses on an innovated technical solution of a solar collector designed for heat conversion, that is to say, primarily for hot water preparation. Photovoltage collectors that perform conversion of solar into electric energy also have a significant role as far as application is concerned [3].

2. Technical and geometric characteristics of the absorber

There are many variants of Solar Thermal Panels in the market mainly constructed with copper pipes and flat absorbers with different quality of absorption surface. Taking into account advantages and disadvantages of existing solutions, in order to increase efficiency and improve the design, the innovative solution of solar thermal panel has been produced.



International Conference on Innovative Ideas in Science (IIS2015)	IOP Publishing
IOP Conf. Series: Materials Science and Engineering 144 (2016) 012011	doi:10.1088/1757-899X/144/1/012011

This new solar thermal panel presents integration of attractive design and appropriate constructive materials with special geometric shapes. Panel is made of special aluminum lamellas in series connection, placed in aluminum thermal-insulated box. The aluminum was chosen for making the absorber because it is significantly lighter than copper. Weight of system is certainly something that should be taken into account, primarily because of the load on the roof structure, which can be significant, especially if a considerable number of panels are placed on the roof [4]. Aluminum also has good technical characteristics in the sense of heat conducting and the possibility of applying appropriate long-term surface protection. The shape and the profile of lamella make the original absorber, and its design has a number of advantages compared to the usual technical solutions. A significant effort has been made to find the geometric profile of ribbed lamella. The surface protection was made by way of special procedure of electrochemical protection, thus obtaining a high quality selective surface of absorber [5].

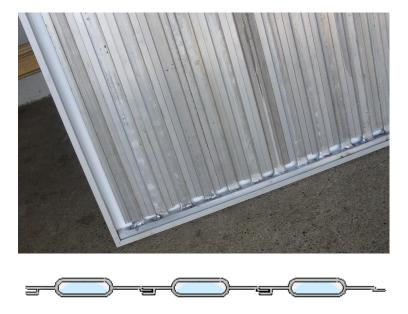


Figure 1. Absorber surface of solar panel with a schematic connection of absorber lamellae (cross-section)

Product	Unit	Receiver of solar energy "Solarmont"
Dimension	mm	910x1980x72
Cover		pamplex glass one sided
Frame and sealing		extruded Al-profile, EPDM rubber
Working medium		water-glycol
Absorber		Al- profile with electrochemical layer
Absorber surface, net	m^2	1,75
Weight of empty receiver	Kg	40,0
Water quantity	L	5,0
Nominal flow	kg/h	124
Maximum working pressure	Bar	6
Maximum working temperature	°C	100

Table 1. Technical data of solar panel "Solarmont"

International Conference on Innovative Ideas in Science (IIS2015) IOP Publishing IOP Conf. Series: Materials Science and Engineering **144** (2016) 012011 doi:10.1088/1757-899X/144/1/012011

3. Hydraulic and thermotechnical tests of solar thermal panel

In order to determine the hydraulic and thermal characteristics of this new solution the solar panel was required to perform appropriate tests [6].

Hydraulic and thermotechnical tests of solar thermal panel were made on Mechanical Engineering Faculty, University of Niš according to standard SRPS M.F5.110, SRPS M.F5.001 and SRPS M.F5.050, with regard to EN 12975 and EN 12976 [7].

On Figure 2 is showed scheme of the measuring line with next elements: 1, 2 Solarimeter, 3 Thermometer at the entrance, 4 Flowmeter, 5 Transparent tube, 6 Filter, 7 Temperature controller, 8 Valve, 9 Pump, 10 Expansion vessel, 11 Safety valve, 12 Venting valve, 13 Thermometer at the exit, 14 Insulation, 15 Gate valve, 16 Anemometer, 17 Ambient temperature.

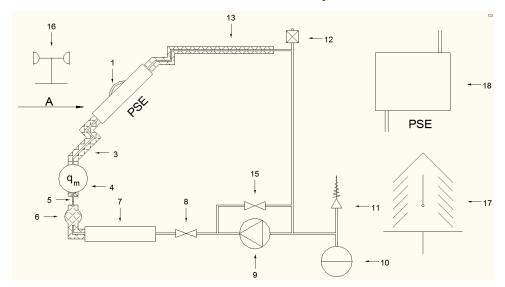


Figure 2. Scheme of the measuring line



Figure 3. Picture of part of the measuring line for hydraulic and thermotechnical tests of solar thermal panel

IOP Conf. Series: Materials Science and Engineering 144 (2016) 012011 doi:10.1088/1757-899X/144/1/012011

4. Results of thermal performance

In order to determine the efficiency of the solar panel it is necessary to calculate the parameters in the next table.

Parameter	Equation
mass flow, kg/s	$q_m = 0.03$
temperature difference	$\Delta T = T_i - T_e$
average temperature	$T_m = T_i + \frac{\Delta T}{2}$
arithmetic average temperature difference	$\Delta T_{sr} = \frac{T_i - T_e}{2} - T_a$
reduced temperature difference	$T^* = U_o \frac{T_m - T_a}{G}$
heat transfer coefficient	$U_o = 10 \frac{W}{m^2 K}$
useful heat	$P_T = q_m c_f \Delta T$
current heat utilization	$\eta = \frac{P_T}{A_a \cdot G}$

Table 2. Parameters to determine the efficiency

The efficiency of the receiver is determined according to

$$\eta = \eta_s - a_1 (T_m - T_s) / G^* - a_2 (T_m - T_s)^2 / G^*$$
(1)

Table 3. Results of solar panel thermotechnical tests

No.	(Tm-Ta)/G	η
	-	-
1	0,00	0,731
2	0,01	0,651
3	0,02	0,581
4	0,03	0,492
5	0,04	0,493
6	0,05	0,351
7	0,06	0,282
8	0,07	0,211
9	0,08	0,128

IOP Conf. Series: Materials Science and Engineering 144 (2016) 012011 doi:10.1088/1757-899X/144/1/012011

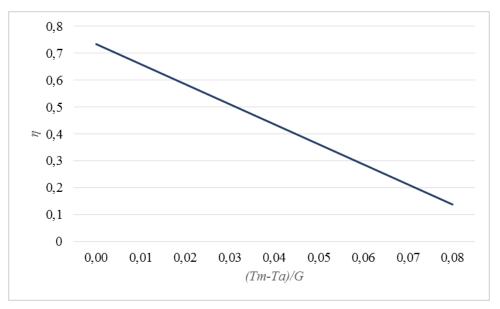


Figure 4. Diagram of the current heat utilization

5. Conclusion

Conducted hydraulic and thermotechnical measurements showed the following:

- Hydraulic and thermotechnical tests that have been performed on this panel showed high hydraulic and structural stability;
- The main disadvantage of the panel is selected electrochemical coating;
- Further development of the solar panel will be done in the future in order to improve some noticed disadvantages.

References

- [1] Majdandžić Lj 2010 Solarni sustavi Teorijske osnove, projektiranje, ugradnja i primjeri izvedenih projekata, Graphis Zagreb
- [2] Deutsche Gesellschaft für Sonnenenergie 2005 Planning and Installing Solar Thermal Systems: A Guide for Installers, Architects and Engineers, Earthscan
- [3] Goswami D Y 2015 Principles of Solar Engineering, CRC Press
- [4] Dobrnjac M and Latinović T 2009 A Constructive Solution for Solar Collector with Aluminium Absorber, Annals of the Faculty of Engineering Hunedoara - Journal of Engineering VII(4) 51 – 56
- [5] Kozić Đ and Dobrnjac M 2013 Development of solar collectors regarding efficiency increasing and the price decreasing, International Conference on Sustainable Energy & Environmental Protection SEEP 2013, Maribor, Slovenia, August 22-23, pp 296-301

[6] Pavlovic T and Cabric B 1999 Fizika i tehnika solarne energetike, Gradjevinska knjiga, Beograd, Serbia

[7] Lambic M 1992 *Prirucnik za solarno grejanje*, Naucna knjiga, Beograd, Serbia