

## Development of High-Surface Area Ni-Alloy Catalysts for Anion Exchange Membrane Water Electrolysis

To cite this article: Sanjeev Mukerjee and Michael K Bates 2013 *Meet. Abstr.* **MA2013-01** 371

View the [article online](#) for updates and enhancements.

### You may also like

- [Impact of Intermittent Operation on Lifetime and Performance of a PEM Water Electrolyzer](#)  
A. Weiß, A. Siebel, M. Bernt et al.
- [Ultra-Low Noble Metal Containing One-Dimensional Nanorods: High Performance Oer Electrocatalyst for Acid Mediated PEM Based Water Electrolysis](#)  
Shrinath Dattatray Ghadge, Oleg I Velikokhatnyi, Moni Kanchan Datta et al.
- [Critical Review—Identifying Critical Gaps for Polymer Electrolyte Water Electrolysis Development](#)  
Ugljesa Babic, Michel Suermann, Felix N. Büchi et al.



### Your Lab in a Box!

The PAT-Tester-i-16: All you need for Battery Material Testing.

- ✓ All-in-One Solution with integrated Temperature Chamber!
- ✓ Cableless Connection for Battery Test Cells!
- ✓ Fully featured Multichannel Potentiostat / Galvanostat / EIS!

[www.el-cell.com](http://www.el-cell.com) +49 40 79012-734 [sales@el-cell.com](mailto:sales@el-cell.com)

**EL-CELL**<sup>®</sup>  
electrochemical test equipment



# Development of high-surface area Ni-alloy catalysts for anion exchange membrane water electrolysis

M. Bates, S. Mukerjee

Northeastern University Center for Renewable Energy Technology  
Northeastern University  
Boston, MA 02115, USA

Anion exchange membranes (AEMs) open an exciting door for the development of non-Pt group metal (PGM) catalysts in fuel and electrolysis cells. Operation in alkaline media enables overcoming the “stability criterion” problem of the acid analog, which restricts its use to PGM catalysts. AEMs allow the use of inexpensive transition metal (TM) catalysts for both hydrogen and oxygen evolution reactions (HER/OER). Activity of TM electrodes relative to PGM is a function of several factors including inner/outer sphere charge transfer, changes in coverage of spectator species and changes to the nature of the transition state. At a certain performance barrier, the cost per kgH<sub>2</sub> will undoubtedly out-compete PGM electrocatalysts. The low cost and abundance of TM catalysts should pave the way for the commercialization of modular water electrolysis systems and facilitate the construction of regional “hydrogen highways”.

Ni-alloy-oxide thin films have recently shown high performance for oxygen evolution in alkaline electrolytes<sup>1</sup>. Ni-alloys also have a long history of moderate performance for hydrogen evolution in alkaline media<sup>2</sup> (as compared to Pt electrocatalysts). More recent studies have shown significantly increased alkaline HER performance from Raney Ni-Mo electrodes.<sup>3</sup>

Recent experiments indicate that Ni-alloys may even out-perform the standard IrO<sub>2</sub> catalysts for oxygen evolution in terms of activity and stability. RDE results show ~30A/g at η=370mV for initial Raney Ni-alloy oxide samples and up to 220A/g for Ni-alloy oxides on commercial Raney Ni supports. However, initial cell testing indicates significant mass-transport and utilization issues requiring optimization of catalyst layer fabrication on gas diffusion electrodes. Thus, synthesis efforts for anode catalysts have begun to optimize conditions for high-surface area Raney Ni-alloy oxides. Anode studies will target structure-activity relationships for OER on the mixed-phase oxide samples and evaluate the OER activity as a function of pH.

Research efforts on cathode development involved RDE screening of binary & ternary carbon-supported Ni-alloys. XRD analysis of initial promising catalysts revealed Ni fcc & metal oxide crystallite phases. These results indicate possible H<sub>ads</sub>-spillover effects theorized for materials with highly reversible oxidation states described in the literature for Ti,Nb,W & Ta bronzes in acidic media<sup>4</sup>, but possibly applicable to TM-oxides in alkaline media. Cell testing for the highest RDE-performance Ni-Cr/C materials showed poor HER performance, so investigations are being conducted into electrodeposited Raney Ni-alloy films for AEMWE cathodes.

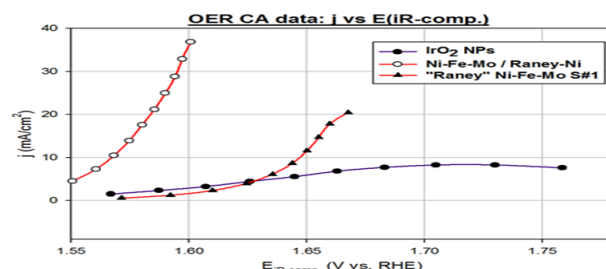


Figure 1 – iR-corrected steady-state polarization data for OER catalysts in RDE cell. 50μg(metal)/cm<sup>2</sup> loading on polished GC disk in 0.1M KOH @50°C.

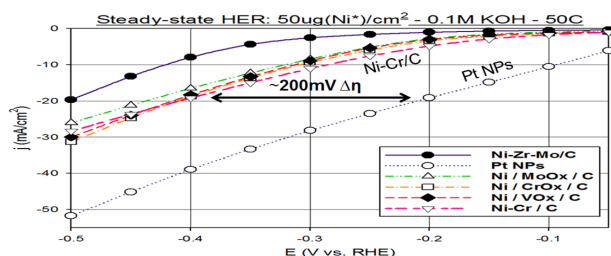


Figure 2 – Steady-state polarization data for HER catalysts in RDE cell. 50μg(metal)/cm<sup>2</sup> loading on polished GC disk in 0.1M KOH @50°C.

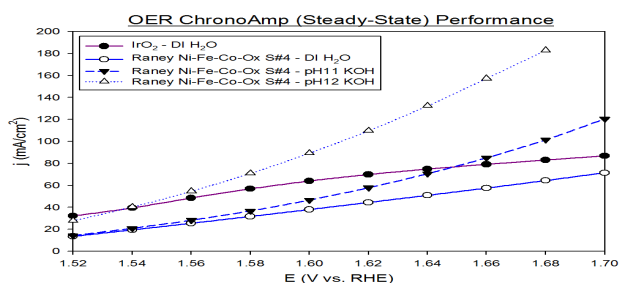


Figure 3 – 6.25cm<sup>2</sup> ½ cell testing: Pt GDE cathode, Tokuyama A201 membrane, Raney Ni-alloy anode @50C, 100mL/min H<sub>2</sub>O(w/ & w/out KOH) anode fuel, 100mL/min H<sub>2</sub>(g) @ 100% RH cathode fuel. Data from steady-state chronoamp. 20mV step, 1min hold.

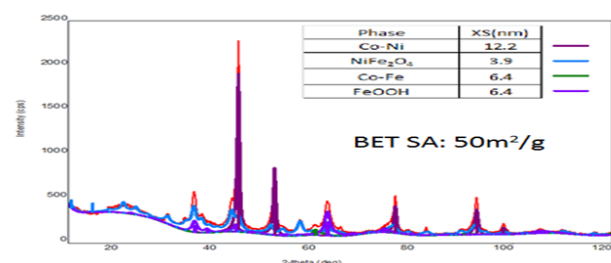


Figure 4 – XRD data (red) & phase fitting from Rigaku PDXL software. Crystallite size (XS) calculated from Scherrer Eq. using whole powder profile fitting procedure in PDXL. BET surface area from Monosorb single-point analyzer.

## Acknowledgement:

Authors gratefully acknowledge the project management and financial support from Proton On-Site as part of an ARPA-E grant and the Army Research Office single investigator grant.

## References:

- (1) Li, X.; Walsh, F. C.; Pletcher, D., *Physical Chemistry Chemical Physics* **2011**, 13 (3), 1162-1167.
- (2) Fan, C.; Piron, D. L.; Slebo, A.; Paradis, P., *Journal of The Electrochemical Society* **1994**, 141 (2), 382-387.
- (3) Lasia, A.; Birry, L. *Journal of Applied Electrochemistry* **2004**, 34, 735-749.
- (4) Jaksic, J. M.; Labou, D.; Papakonstantinou, G. D.; Siokou, A.; Jaksic, M. M., *Advances in Physical Chemistry* **2011**,