

Electrochemical Characteristics of Carbon-Coated $\text{Li}_4\text{Ti}_5\text{O}_{12}$ By Carbon Source and Structure for Hybrid Capacitor

To cite this article: Sujin Yun *et al* 2013 *Meet. Abstr.* **MA2013-02** 671

View the [article online](#) for updates and enhancements.

You may also like

- [Effect of Specific Surface Area of Counter Electrode in Hybrid Capacitor Type Electrochromic Device](#)
Zhuang Liang, Kazuki Nakamura and Norihisa Kobayashi
- [A Magnesium-Activated Carbon Hybrid Capacitor](#)
Hyun Deog Yoo, Ivgeni Shterenberg, Yosef Gofer *et al.*
- [Electrochemical Charge/Discharge Properties of Li Pre-doped Si Nanoparticles for Use in Hybrid Capacitor Systems](#)
Morihiro Saito, Kojiro Takahashi, Kimie Ueno *et al.*



Your Lab in a Box!

The PAT-Tester-i-16: All you need for Battery Material Testing.

- ✓ All-in-One Solution with integrated Temperature Chamber!
- ✓ Cableless Connection for Battery Test Cells!
- ✓ Fully featured Multichannel Potentiostat / Galvanostat / EIS!

www.el-cell.com +49 40 79012-734 sales@el-cell.com

EL-CELL®
electrochemical test equipment



Electrochemical Characteristics of Carbon-Coated $\text{Li}_4\text{Ti}_5\text{O}_{12}$ by carbon source and structure for Hybrid Capacitor

Sujin Yun¹, Hanjoo Kim², Hongil Kim², Soogil Park¹,
Kyuwon Jeong^{*1}

¹ Chungbuk National University

¹ Naesudong-ro, Heungdeok-gu, 361-763, Cheongju,
Chungbuk, Korea

² Purechem

² Haed office Factory block 2 floor, Jikji-daero 474 beon-
gil60, Heungdeok-gu, Cheongju-si Chungbuk, Korea

*E-mail: jeong@cbnu.ac.kr

The Electrochemical hybrid capacitors can perform that need to high power operations and long cycle life. Beside with a high power capability and relatively large energy density compared to conventional capacitors. The hybrid capacitor utilizes the charge-transfer pseudocapacitance arising from reversible Faradic reactions. [1]

$\text{Li}_4\text{Ti}_5\text{O}_{12}$ has many advantages such as good reversibility of Li-ion insertion / extraction and near-zero structural change during charging and discharging. Despite many advantages associated with $\text{Li}_4\text{Ti}_5\text{O}_{12}$, its low electronic conductivity at room temperature ($<10^{-13} \text{ S cm}^{-1}$) results in initial capacity loss and poor rate capability. Several methods have been utilized to improve the electronic conductivity of $\text{Li}_4\text{Ti}_5\text{O}_{12}$ and positive results have been reported. [2]

Our strategy is synthesizing $\text{Li}_4\text{Ti}_5\text{O}_{12}$ coating with conductive carbon. Especially, it was expected to lead to adequate improvement of the electrical conductivity of $\text{Li}_4\text{Ti}_5\text{O}_{12}$. This aspect is attracted to use a carbon-coated $\text{Li}_4\text{Ti}_5\text{O}_{12}$ as negative electrode in non-aqueous hybrid supercapacitor. [3]

First, various carbon materials were used as coating sources for the carbon coating on the surface of $\text{Li}_4\text{Ti}_5\text{O}_{12}$. In addition, the high rate charge-discharge characteristics and cycle ability were conformed to apply that to hybrid capacitor by electrochemical analyzing carbon sources

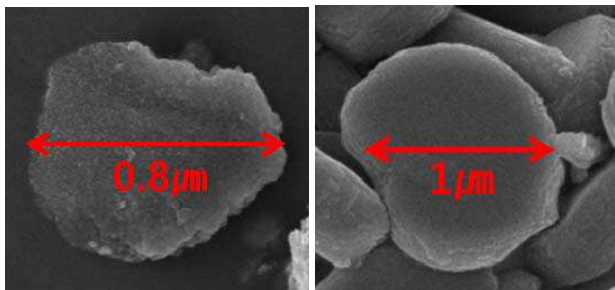


Fig 1 Scanning electron microscope images of $\text{Li}_4\text{Ti}_5\text{O}_{12}$ and carbon coated $\text{Li}_4\text{Ti}_5\text{O}_{12}$ from styrene.

In this study, Carbon-coated $\text{Li}_4\text{Ti}_5\text{O}_{12}$ was synthesized by sol-gel method using lithium hydroxide (LiOH) and tetratitanium iso-propoxide (TTIP), and various organic composite. We have researched the developed electrochemical characteristics of carbon-

coated $\text{Li}_4\text{Ti}_5\text{O}_{12}$ spherical particles. Carbon-coated $\text{Li}_4\text{Ti}_5\text{O}_{12}$ was analyzed by scanning electron microscopy and X-ray diffraction. The carbon content was measured by elemental analysis and thermogravimetric analysis. The direct current electrical conductivity was measured using a direct voltametry method. The electrochemical analyses were accomplished to asymmetric hybrid capacitor.

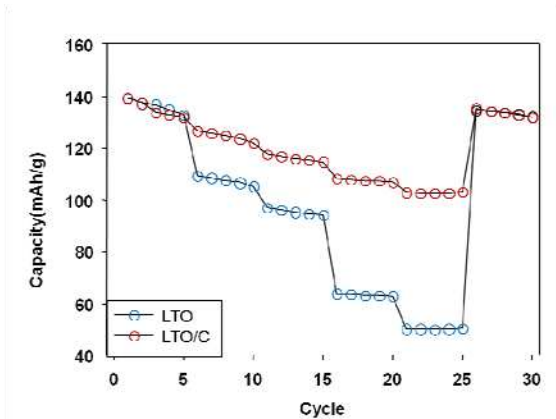


Fig 2 Discharge capacity by current density of LTO and LTO-C composite from styrene in LiBF_4/PC

Reference

[1] H-G Jung, N Venugopal, B Scrosati, Y-K Sun, Journal of Power Sources 221 (2013) 266-271..
[2] K. Kanamura, T. Chiba, K. Dokko, Journal of the European Ceramic Society 26 (2006) 577-581.
[3] W. Fang, X. Cheng, P. Zuo, Y. Ma, G. Yin, Electrochimica Acta 93 (2013) 173-178