

ERRATUM

Erratum: Fabrication of highly conductive polyester fabrics using single-wall carbon nanotubes inks for EMI shielding [Jpn. J. Appl. Phys. [63 04SP01](#) (2024)]

To cite this article: Yuito Horita *et al* 2024 *Jpn. J. Appl. Phys.* **63** 049401

View the [article online](#) for updates and enhancements.

You may also like

- [First-principles study on shape of intrinsic hBN island nucleated during CVD initial growth on Cu\(111\)](#)
Ryo Imamura and Hiroyuki Kageshima
- [An advanced monolithic digitalized random carrier frequency spread-spectrum clock generator for EMI suppression](#)
Guo Haiyan, Chen Zao, Zhang Bo et al.
- [Anisotropic properties of acoustically induced electric polarization in soft fibrous biological tissues](#)
Junna Kikuchi, Yuki Sakakura and Kenji Ikushima



Erratum: Fabrication of highly conductive polyester fabrics using single-wall carbon nanotubes inks for EMI shielding [Jpn. J. Appl. Phys. **63** 04SP01 (2024)]

Yuito Horita¹ , Taiki Fukase¹, Hibiki Kisaka¹, Sho Kuromatsu¹, Yusuke Sato², Kazuyuki Endo², Takeshi Watanabe¹ , Ryosuke Suga¹, and Shinji Koh^{1,*}

¹Department of Electrical Engineering and Electronics, College of Science and Engineering, Aoyama Gakuin University, 5-10-1 Fuchinobe, Chuo-ku, Sagami-hara, Kanagawa 252-5258, Japan

²Department of Advanced development, Technical center, NOHON PLAST Co., LTD., 3507-15 Yamamiya, Fujinomiya, Shizuoka 418-0111, Japan

*E-mail: koh@ee.aoyama.ac.jp

Received March 28, 2024; accepted March 28, 2024; published online April 23, 2024

Due to an error in the production process, there are several corrections needed in this article.

In the caption of Fig. 10, $\Delta R_S R_S$ should be ΔR_S . The correct caption and figure are shown below:

On page 04SP01-5 the following sentence “Fig. 10 shows the $\Delta R_S R_S$ of the LT-SWCNT-polyester fabrics under 100 bending cycles. We observed about 1%–2% change in the $\Delta R_S R_S$, which was considerably small.” $\Delta R_S R_S$ should be corrected to ΔR_S to read “Fig. 10 shows the ΔR_S of the LT-SWCNT-polyester fabrics under 100 bending cycles. We observed about 1%–2% change in the ΔR_S , which was considerably small.”

On page 04SP01-6 the following sentence “Furthermore, we simulated the SE using HFSS for $\Delta R_S R_S$ of 1%–2% (Fig. S6), in which the SE of the LT-SWCNT-polyester fabrics was estimated to be almost unchanged after the 100 bending cycles.” $\Delta R_S R_S$ should be corrected to ΔR_S to read “Furthermore, we simulated the SE using HFSS for ΔR_S of 1%–2% (Fig. S6), in which the SE of the LT-SWCNT-polyester fabrics was estimated to be almost unchanged after the 100 bending cycles.”

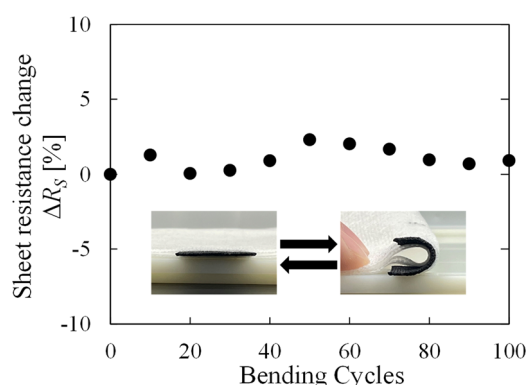


Fig. 10. Sheet resistance change ΔR_S of LT-SWCNT-polyester fabrics under 100 bending cycles.